

**KINGSVILLE TOWNSHIP PAVING
(Dibble Road Paving)
KINGSVILLE, OHIO**

**TO PROSPECTIVE BIDDERS
MARCH 19, 2025
ADDENDUM NO. 2**

The attention of all prospective bidders for the subject project is directed to the following additions and modifications to the bidding documents:

MODIFICATIONS TO THE PLANS :

The Shoulder Restoration material shall be Item 411. Replace Sheet 2 and 3 in the plan set with the attached sheets.

Please email back to our office a signed copy of the Addendum acknowledgement form prior to the bid opening date. Email: mike.defazio@kingsvilletwp.org

**ACKNOWLEDGEMENT OF ADDENDUM NO. 2
KINGVILLE TOWNSHIP PAVING
KINGSVILLE, OHIO**

Our office has received Addendum No. 2 and will include the changes in our Bid Proposal.

Company Name _____


Address _____

Signature _____

Title _____

Date _____

PROPOSED TYPICAL SECTION

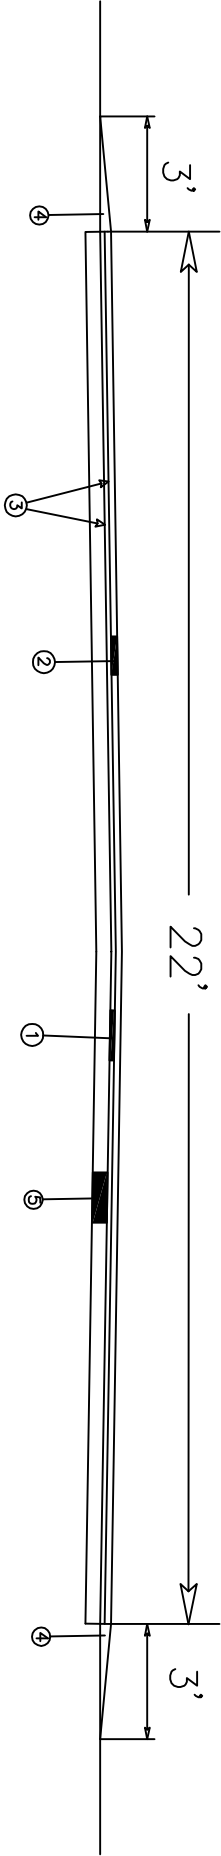

- ① Item 441 1" Asphalt Concrete Intermediate Course (Scratch), Type 1, (448) PG(64-22)
- ② Item 441 1.5" Asphalt Concrete Surface Course, Type 1, (448) PG(64-22)
- ③ Item 407 Tack Coat
- ④ Item 411 Shoulder Restoration
- ⑤ Existing Road

<div><div>2</div><div>4</div></div>	ASHTABULA COUNTY ENGINEERING DEPARTMENT TIMOTHY T. MARTIN-COUNTY ENGINEER		TYPICAL SECTION		SCALE:		DRAWN: H.J.M.	
	DIBBLE RD, KINGSVILLE TWP. OH - PAVING				DATE: 1/7/25		REVISION:	

Dibble Road

Township Line to SR 84 = 7,600'

7,600' = 1.439 Miles

Approach Areas = 2,262 Sq. Ft.

Item 441 Type 1 Surface Course

22' X 7,600' X (1.5" / 12) = 20,900 Cu. Ft.

2,262 X (1.5" / 12) = 283 Cu. Ft.

20,900 + 283 + 188 = 21,371 Cu. Ft.

21,371 / 27 = 792 Cu. Yd.

Item 441 Type 1 Intermediate Course (Scratch)

22' X 7,600' X (1' / 12") = 13,934 Cu. Ft.

2,262 X (1' / 12") = 189 Cu. Ft.

13,934 + 189 = 14,123 Cu. Ft.

14,123 / 27 = 524 Cu. Yd.

Item 407 Tack Coat

22' X 7,600' = 167,200 Sq. Ft.

(167,200 X 2) + (2,262 X 2) + 1,800 = 340,724 Sq. Ft.

340,724 / 9 = 37,859 Sq. Yd.

37,859 X 0.06 = 2,272 Gal.

Item 411 Shoulder Restoration

3' X 7,600' X (2.5" / 12") = 4,750 Cu. Ft.

4,750 / 27 = 176 Cu. Yd.



ASHTABULA COUNTY ENGINEERING
DEPARTMENT
TIMOTHY T. MARTIN—COUNTY ENGINEER

CALCULATIONS

DIBBLE RD, KINGSVILLE TWP. OH – PAVING

SCALE:

DATE: 1/7/25

DRAWN: H.J.M.

REVISION: